

ATTORNEY'S DOCKET NUMBER
144-198

TRANSMITTAL LETTER TO THE UNITED

STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371U.S.
APPLICATION NO. (If known, see 37 C.F.R. 1.5)**09/242191**EXPRESS MAIL NO.
EL1208953025US

INTERNATIONAL APPLICATION NO.

PCT/FR97/01488

INTERNATIONAL FILING DATE

13 August 1997

PRIORITY DATE CLAIMED

13 August 1996

TITLE OF INVENTION: DEVICE FOR GENERATING MAGNETIC FIELDS FOR CATALYZING PHYSICO-CHEMICAL REACTIONS

APPLICANT(S) FOR DO/EO/US: RIERA, MICHEL

FEB 1999

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371 (b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An unsigned oath or declaration of the inventors. (35 U.S.C. 371 (c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
Certificate of Express Mailing Under 37 CFR 1.10

U.S. APPLICATION NO (If Known, see 37 C.F.R. 1.50)		INTERNATIONAL APPLICATION NO PCT/FR97/01488		ATTORNEY'S DOCKET NUMBER 144-198	
--	--	--	--	-------------------------------------	--

17. <u>X</u> The following fees are submitted:				CALCULATIONS	PTO USE ONLY
Basic National Fee (27 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$840.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$670.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)). \$760.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$ 96.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 970.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <u> </u> 20 <u>X</u> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 130.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	12- 20 =	0	x \$18.00	\$ 0.00	
Independent Claims	1 - 3 =	0	x \$78.00	\$ 0.00	
Multiple dependent claim(s) (if applicable)			+ \$260.00	\$260.00	
TOTAL OF ABOVE CALCULATIONS =				\$1360.00	
Reduction by 1/2 for filing by small entity, applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$ 0.00	
SUBTOTAL =				\$1360.00	
Processing fee of \$130.00 for furnishing the English translation later than <u> </u> 20 <u> </u> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+ \$ 0	
TOTAL NATIONAL FEE =				\$1360.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+ \$ 0.00	
TOTAL FEES ENCLOSED =				\$1360.00	
				Amount to be refunded	\$
				charged	\$1360.00

a. <u> </u> A check in the amount of \$_____ to cover the above fees is enclosed.		
b. <u>X</u> Please charge my Deposit Account No <u>19-1135</u> in the amount of <u>\$1360.00</u> to cover the above fee. A duplicate copy of this sheet is enclosed.		
c. <u>X</u> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>19-1135</u> A duplicate of this sheet is enclosed.		

NOTE: Where an appropriate time limit under 367 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
 SEIDEL, GONDA, LAVORGNA & MONACO, P.C.
 Two Penn Center Plaza
 Suite 1800
 Philadelphia, Pennsylvania 19102
 United States of America

SIGNATURE
DANIEL A. MONACO

NAME

30,480

REGISTRATION NUMBER

APPLICANT OR PATENTEE: Michael Riera

SERIAL NO. OR PATENT NO. 09/242,272 Attorney's Docket No.: 144-198(2)

FILED OR ISSUED: February 12, 1999

TITLE: Device for Generating Magnetic Fields For Catalyzing Physico-Chemical Reactions

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled: Device for Generating... described in:

☐ The specification filed herewith

☒ Application Serial No. 09/242,272, filed February 12, 1999

☐ Patent No. _____, issued _____

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☐ no such person, concern, or organization

☐ persons, concerns, or organizations listed below *

* NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27).

FULL NAME: _____

ADDRESS: _____

☐ INDIVIDUAL

☐ SMALL BUSINESS CONCERN

☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Michel RIERA

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR

SIGNATURE OF INVENTOR

SIGNATURE OF INVENTOR

SIGNATURE OF INVENTOR

DATE

23/02/1999

DATE

DATE

09/242191
300 Rec'd PCT/PTO 10 FEB 1999

ATTORNEY DOCKET NO.: 144-198
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
ACTING AS THE ELECTED OFFICE

In re application of:
Michel Riera

Group Art Unit: Not Yet Assigned

Examiner: Not Yet Assigned

International Application No.:
PCT/FR97/01488

International Filing Date:
13 August 1997

Serial No.: Not Yet Assigned

Filed: Concurrently Herewith

For: **DEVICE FOR GENERATING MAGNETIC FIELDS
FOR CATALYZING PHYSICO-CHEMICAL REACTIONS**

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
BOX PCT
Washington, D.C. 20231

Attention: US/DO/EO


Dear Sir:

Prior to examination of this application and before calculation of the filing fee,
please amend the application, without prejudice, in accordance with the following.

CERTIFICATE OF MAILING
UNDER 37 C.F.R. 1.10

EXPRESS MAIL Mailing Label Number: EL208953025US
Date of Deposit: 10 February 1999

I hereby certify that this correspondence, along with any paper referred to as being attached or enclosed, and/or fee, is being deposited with the United States Postal Service, "EXPRESS MAIL - POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10, on the date indicated above, and addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.



Signature of person mailing paper

Lynne Webb

Type or print name of person

Charge any fee or credit any overage associated with this preliminary amendment or the application filing to Deposit Account No. 19-1135.

* * *

Please amend the application, without prejudice, in accordance with the following.

In the Claims:

Amend claim 6 as follows:

6. A device as claimed in [one of claims 1 to 5,] claim 1, in which said given medium is a fluid flowing through a pipe [(20)], said first and second means for generating a magnetic field being disposed on the exterior of said pipe (figures 1 and 6A).

7. A device as claimed in [one of claims 1 to 5,] claim 1, in which said given medium is a fluid flowing through a pipe [(20)], said first and second means for generating a magnetic field being disposed inside said pipe (figure 8).

9. A device as claimed in [one of claims 1 to 8,] claim 1, having several parallel magnetic field planes (figures 9 and 10).

10. A device as claimed in [one of claims 1 to 9,] claim 1, in which said means for generating a magnetic field of variable amplitude comprises a pair of coils [(10, 10')] having a core of a ferromagnetic substance to close the magnetic fields generated by said coils, said core optionally being U-shaped, [(16)] in which case the magnetic field generated occurs in two parallel planes (figure 2), or E-shaped [(16)] in which case the magnetic field generated occurs in three parallel planes (figure 3).

11. A device as claimed in [one of claims 1 to 10,] claim 1, in which said given medium is a limestone water, the application of the magnetic field generated preventing the deposit of limestone incrustations on the walls of pipes, boilers, etc. . .

12. A device as claimed in [one of claims 1 to 10,] claim 1, in which said given medium is a fuel for a heat engine, the application of the magnetic field generated enabling said fuel to enhance and improve combustion efficiency.


REMARKS

The above amendments are intended to remove multiple dependency within the claims prior to entry into the U.S. national phase.

Applicant hereby requests entry of the above amendment prior to calculation of the filing fee and examination.

Respectfully submitted,

MICHEL RIERA

By: 

DANIEL A. MONACO
Registration No. 30,148
Seidel, Gonda, Lavorgna
& Monaco, P.C.
Suite 1800
Two Penn Center Plaza
Philadelphia, PA 19102
Telephone No.: (215) 568-8383
Facsimile No.: (215) 568-5549

Attorney for Applicant

Device for generating a magnetic field designed to
catalyse physical-chemical reactions

The present invention relates to the catalysis of
5 chemical or physical-chemical reactions by moving
magnetic fields within substances to be treated and in
particular a device for creating a moving magnetic field
with a view to creating stereochemical deformations of
the molecules in a given medium.

10 It is known that during the last world war,
permanent magnets were used on fuel delivery pipes of
aircraft engines as a means of reducing the fumes
created, thereby making detection in the sky more
difficult.

15 Since then, numerous patents have been filed on the
subject of using magnetic fields to enhance fuel
combustion, the general features of which have related to
static or omnidirectional and alternating magnetic
fields.

20 Documents GB 2.250.221, WO 93/08127 or WO 96/10692
in particular describe the use of fixed magnetic fields,
optionally superposed on alternating fields, with a view
to producing a magnetic field perpendicular to or
parallel with the flow direction of a fluid as a means of
25 inducing stereochemical reactions.

However, the results clearly show that if the fields
are perpendicular to the axis of the fluid pipe, the
increase in combustion performance depends on the speed
at which the fuel passes across the magnetic field and
30 the intensity of this magnetic field.

This observation is clearly reminiscent of Laplace's

law on electromagnetism and P. Langevin's theory relating to the effect of magnetic fields on any type of material, whether it be insulating or conductive.

If applied to the peripheral electrons of molecules
5 or organised molecular complexes, P. Langevin's theory, which explains the general phenomena of diamagnetism, based on Laplace's law: $F = e \cdot V \cdot H$, allows us to consider the question of whether the relative velocity V is not
10 only that of the displacement of a peripheral electron on its own orbit but also that of the relative displacement of the magnetic field with respect to the fluid, in which case it causes an orbital displacement of the electron and leads to a stereochemical deformation of the molecule or molecular complex, which may be of a not
15 inconsiderable lifetime.

These stereochemical deformations of the molecules are known to be the mechanism whereby physical catalysts which adsorb reactants act, such as platinum foams, finely divided Raney nickel, etc., which have tended to
20 become less commonly used, having been replaced by chemical catalysts which often act by means of a comparable mechanism.

To get a clear idea of the concepts involved, it is useful to look at the example of a fuel. This is an
25 octane or at least an alkane with a longer or shorter chain. From 4 carbon atoms, i.e. butane (in this case a gas), there are several possible stereochemical arrangements of the molecule. In its lowest energy state, i.e. its normal state, it has a clustered shape with the
30 minimum of reactive sites. If the peripheral electrons of the molecule are excited by a magnetic field moving

rapidly relative to the fuel, they change to higher energy states, i.e. are on a higher orbital in accordance with Schrödinger's theory, causing stereochemical deformation of the molecule. The molecule changes to a higher energy state in the linearly developed form, thereby offering the maximum of reactive sites; the activation energy of the reaction is therefore reduced accordingly.

It has also been known for a long time that static or omnidirectional and alternating magnetic fields superposed co-linearly promote crystalline seeding within saline solutions passing through them.

The mechanisms which cause this are assumed to be those of agitation of the ions, this being generated by the Laplace forces which induce a number of shocks and promote seeding.

Accordingly, patent BE 461.600 describes a device which generates a rotating magnetic field designed to create Foucault currents as a means of preventing deposits of incrustation on the walls of ducts or other pipelines through which water to be processed flows.

Designed as the stator of an asynchronous electric motor, the rotating magnetic field is produced at a constant intensity and rotates at the frequency of the polyphase current used. It should also be pointed out that the characteristics of the water causing incrustation may vary to a large degree and the device must be capable of generating a wide range of Foucault currents in order to cover the range required by the nature of the water to be treated. This variation is obtained by increasing the thickness of the water streams

subjected to the magnetic field or by varying the characteristics of the Foucault current generator along the path. The variations which can be applied are therefore specific to the initial mechanical
5 characteristics of the device and can not be adapted to suit a particular situation.

It has been shown that the effect of a magnetic field on a saline solution such as water containing calcium salts is comparable to the effect of a magnetic
10 field on a hydrocarbon. In fact, it is known that an ion does not exist in isolated form in its solvent but is surrounded by a set of solvent molecules. The make-up of this set, ion plus solvent molecules, is formed as a result of the solvation energy and this set is kept
15 stable, with a minimum energy, which allows the salt to remain dissolved. It is also known that the internal asperities of the walls of fluid-carrying pipes have sufficient energy to adsorb the solvation complexes, modify their stereochemical arrangements and initiate
20 crystallisation. This latter phenomenon explains the build-up of scale in pipes, particularly if they are heated. The action of a magnetic field moving relative to the water in addition to the simple Laplace force on the main electric charge which the ion represents, and which
25 therefore naturally generates a Foucault current, builds up forces on the peripheral electrons of this solvation complex and, as with any molecule or molecular or ionic complex in accordance with P. Langevin's theories, enables the energy of these electrons to be increased.
30 The orbital change of the peripheral electrons modifies the stereochemical arrangement of the complex and, by the

same solvation energy, thereby reduces the seeding energy for the crystals, enabling them to be generated spontaneously and in large numbers within the actual fluid. Once created, these seed crystals grow within the fluid but no longer stick to the walls.

In effect, in both of the applications described above, the results obtained have never been altogether conclusive, nor have they lived up to what one might have expected from the use of magnetic fields. This is explained by the fact that it is very difficult to ascertain how much energy is needed to produce the desired deformation of the molecules due to the fact that it is dependent on how much energy the electrons absorb in order to move from one electronic orbital into another and is based on the quantum theory. Until now, no attempt has been made to put this latter into practice in order to generate magnetic fields as a means of inducing stereochemical deformation.

Accordingly, the main objective of the invention is to provide a device for generating a moving magnetic field used in a fluid medium in order to induce therein stereochemical deformation of the molecules irrespective of the levels of energy required to obtain the best possible result.

The solution to this problem provided by the invention consists in subjecting the molecules or molecular or ionic complexes to a wide range of magnetic energy within which the molecule or complex will be able to absorb exactly the energy it requires in the same way as a coloured body absorbs within the light spectrum only those radiations corresponding to permitted transitions.

In order to achieve this result, the overriding idea is that the gradient of the vector product, according to Laplace's law, between the magnetic field H and the relative velocity V of the field in relation to the fluid should have the highest value possible, the only way of producing this being to apply a moving magnetic field of variable amplitude and variable angular velocity. It should be pointed out that the relative velocity V is essentially the displacement velocity of the magnetic field given that this velocity is higher than the velocity at which the fluid circulates and that the fluid does not necessarily have to be moving.

Accordingly, the objective of the invention is to provide a device for generating a magnetic field moving in at least one magnetic field plane located in the medium to be treated and for which the vector product of the intensity of the magnetic field by its displacement velocity induces stereochemical deformations of the molecules of the medium. In each magnetic field plane, there are at least two means for generating a first and a second magnetic field, the directions of the magnetic fields subtending a predefined angle θ and at least one of these magnetic fields being of a variable amplitude over time so that the resultant of the two magnetic fields is a magnetic field moving in the plane of the field which has a variable amplitude over time and in a direction moving at a variable angular velocity such that the gradient of the vector product is of the highest possible value.

The objectives, aims and features of the present invention will become clearer from the description below,

given with reference to the drawings, in which :

figure 1 illustrates a view in section of a generating device of a first embodiment of the device as proposed by the invention, applied to a pipeline through which the fluid to be treated is flowing,

figure 2 depicts a view in section of a device of the type illustrated in figure 1, in which the magnetic field of a pair of coils is closed by a U-shaped armature,

figure 3 shows a view in section of a device of the type illustrated in figure 1, in which the magnetic field of a pair of coils is closed by an E-shaped armature,

figures 4A, 4B, 4C depict respectively the sinusoidal amplitude of the first magnetic field used in a specific example of a first embodiment of the device proposed by the invention, the sinusoidal amplitude of the second magnetic field and the curve described by the vector end of the resultant magnetic field,

figures 5A, 5B, 5C depict respectively the sinusoidal amplitude of the first magnetic field used in another specific example of the first embodiment of the device, the sinusoidal amplitude of the second magnetic field and the curve described by the vector end of the resultant magnetic field,

figures 6A, 6B, 6C depict respectively a view in section of a second embodiment of the generating device, applied to a pipeline through which the fluid to be treated is flowing, and the two end positions of the vector representing the resultant magnetic field,

figure 7 illustrates a third embodiment of the device proposed by the invention in which the magnetic

field is not perpendicular to the direction in which the fluid to be treated is moving.

figure 8 represents a fourth embodiment in which the device of the invention is incorporated in the passage
5 through which the fluid to be treated is circulating,

figure 9 is a view in section of a variant of the first embodiment of the invention having several magnetic field planes, and

figure 10 is a view in section of a specific example
10 of the embodiment illustrated in figure 9.

As illustrated in figure 1, a first embodiment of the invention consists in arranging two pairs of coils 10, 10' and 12, 12' (it should be noted that each pair of coils could be replaced by a single coil) in a matching
15 layout and forming an angle of θ degrees, this angle being adjustable and being variable between a minimum value obtained when the coils are in contact (as in the drawing) and a maximum value of 180° less the minimum angle imposed by the dimensions of the coils. The coils
20 are made up of n turns of electric wire, n being variable by several turns in the case of high frequencies or high current intensities up to several thousand turns in the case of low intensities or low frequencies and conventionally having a core of a ferromagnetic
25 substance, possibly made up of sheets of iron for low frequencies, and more generally of mild ferrites accepting very high frequencies. This core may be in the shape of a simple bar but it is possible to use shapes which would enable the magnetic fields to be closed such
30 as the core 14 of figure 2 which is U-shaped or the core 16 of figure 3 which is E-shaped.

In this embodiment, the pairs of coils are arranged at the periphery of the pipe 20 through which the fluid to be treated is circulating.

It should be pointed out that the magnetic fields applied by the coils of figure 1 are in a single field plane whereas the magnetic fields generated by the coils in figure 2 are located in two parallel field planes due to the U-shape whilst those of figure 3 are located in three parallel fields due to the E-shape.

In the device illustrated in figure 1, each pair of coils is supplied by a current complying with a law of natural amplitude which may be any and a natural frequency without necessarily being in any relation one to the other. The resultant field is then of a totally variable amplitude which may possibly and periodically be the vector sum of the maximum amplitudes of the separately produced fields, which can represent quite considerable amplitude variations of the fields, variable in direction depending on the angular velocities which are also variable and which may assume high values depending on the frequencies used. The spectrum of energies represented by H^2V as a function of time is therefore very wide and amply covers the bands of energy required to change the molecules from a stable, low energy state into an excited, higher energy state which will be of an acceptable lifetime.

One embodiment using the device schematically illustrated in figure 1 consists in using pairs of coils generating magnetic fields whose amplitude is sinusoidal as a function of time. Accordingly, sinusoidal currents may be applied to the pairs of coils, having different

amplitudes, the same frequency but phase-shifted by any angle. Figures 4A and 4B provide graphs of the magnetic fields generated by the coils at a phase-shift of 90° . Figure 4C illustrates the curve described by the end of the resultant magnetic vector and that of its angular sweep velocity, the drawing being given for time intervals of one eighth of the period, and clearly illustrates the fact that the gradient is steeper the greater the difference in amplitudes.

Sinusoidal currents of the same amplitude but which have different frequencies from one another, for example double, may also be applied to the two pairs of coils. The graphs of the magnetic fields generated by such coils at double frequency are illustrated in figures 5A and 5B. Figure 5C shows the curve described by the end of the resultant magnetic vector and that of its angular sweep velocity, the drawing being based on a unit of one eighth of the lowest frequency. It clearly illustrates the fact that the gradient is steeper the greater the difference between the frequencies.

In the case of the two examples above, we have highlighted the importance of the differences in amplitude and frequency of the fields combining to produce the variable moving field.

To keep matters simple, we have not illustrated variations in the resultant fields other than those produced by phase-shifts of 90° or variations in the resultant fields produced by the values which may be assumed by the angle θ between the two directions of the component fields. The person skilled in the art will know how to continue this demonstration.

A second embodiment of the device proposed by the invention is illustrated in figures 6A, 6B, 6C. In these instances, the device has a pair of permanent magnets 30 and 30' (a single permanent magnet could also be used), diametrically opposed so that their fields are combined (the North pole of one faces the South pole of the other) and a pair of matching coils 32 and 32', i.e. diametrically opposed and wound so that their fields combine, placed at θ degrees from the magnets as illustrated in the drawing. When current complying with a law of any intensity (this may of course be sinusoidal but it may also be saw-tooth or any other law which is repetitive or not) is applied to the coils the vector sum of the magnetic field created by the permanent magnets and the field of fixed direction but variable amplitude generated by the coils gives a resultant field whose amplitude, direction and algebraic velocity are variable. This resultant field may be described as oscillating and exhibits all the characteristics of the invention. Figure 6B illustrates the position of the resultant field when the variable field is maximum in one direction and figure 6C when the field is maximum in the opposite direction. During our endeavours to obtain a wide variation in the spectrum V^H , it was particularly interesting that the direction in which the resultant field is displaced changes; this is particularly so in this instance with these fields which can be described as oscillating.

Between these two extremes, illustrated in figures 6B and 6C, the resultant field vector is displaced at a variable angular velocity and at an amplitude which is also variable, complying with the law of the current

applied to the coils. It may be noted that the end of the vector representing the resultant magnetic field is located on a segment whose two ends A and B are reached at the two maxima of the variable field. It is
5 interesting to note that if the cores of the coils are U-shaped or E-shaped, the permanent magnet, whose length is equal to the distance of the poles from the U or E, these poles emitting fields in opposite directions, the movements of the fields combined with the static field of
10 the permanent magnet are naturally of the opposite direction, which increases the values of the spectrum of $H^{\wedge}V$ sought.

The device is of a simple construction and requires nothing more than a current generator of variable
15 frequency in order to place the spectrum of the values $V^{\wedge}H$ in the desired range to produce the required reaction.

The field plane is not necessarily perpendicular to the axis of the fluid flow through the passage 20 but may be inclined at a certain angle, as are the coils 34 and 34' of the third embodiment of the device illustrated in figure 7. This inclination may be of any value since within the product $V^{\wedge}H$, the velocity considered is not that of the fluid movement but solely that of the
25 relative displacement of the field and the angle between V and H is therefore always 90° although if the angle of inclination were greater, it would tend to move the coils farther apart and consequently reduce the intensity of the field produced. It is therefore reasonable not to
30 exceed 45° for this angle of inclination relative to the axis of the fluid pipe.

In a fourth embodiment of the device proposed by the invention, the pairs of coils 36, 36' and 38, 38' or polar elements are inside the pipe 20. In this case, the polar elements are coated with an electrically insulating resin 40 which is not ferromagnetic. This is also almost the equivalent of an asynchronous motor with a central stator, again with the same difference that the angle subtended by the axis of the coils, pairs of coils or permanent magnets is not imposed but must be calculated in order to obtain the desired result. If encased in an insulating resin, it can not, unfortunately, be adjusted subsequently.

So far, all the polar elements (permanent magnets or coils) have been shown as being in a same field plane. However, since the polar elements have a natural width which is not limited in theory but is so by practical conditions, hence ranging between several millimetres and up to as much as several centimetres and more in the case of large devices, it is possible to think in terms of a given section of width within which the effects of the moving fields will occur. It is therefore perfectly conceivable, as illustrated in figure 9 and figure 10, which is view in section of a specific example of figure 9 in which all the coils are aligned along one generatrix in the passage, to join any number of sections of moving fields which may possibly have the same spectrum characteristics as regards values H^*V , with the sole aim of increasing the field of action and the total power of the device, but these may also be totally different.

In all the embodiments of the device proposed by the invention described above, the use of magnetic fields

whose amplitude and displacement velocity are variable is a simple method and offers a large degree of flexibility since the intensity of the magnetic field, its range of variation and its displacement velocity are values which
5 are entirely controllable, being readily adaptable to the type of chemical or physical-chemical reaction required, and act on the very core of the substances, regardless of their nature, be they gas, liquids irrespective of viscosity or powdered solids, and not only on the
10 adsorption surfaces. Efficiency is therefore particularly enhanced and is totally independent of the velocity at which the fluid is moving, it also being possible for the fluid to be static.

By adapting the parameters (intensity, frequency, amplitude, angular velocity), it is possible to cover
15 larger or smaller spectra of values $V \cdot H$ which can be adapted to suit the type of chemical or physical-chemical reaction required.

The first embodiment of the device proposed by the invention (illustrated in figure 1) is mainly used in
20 applications involving the magnetic treatment of water likely to give rise to incrustation. The anti-scale effect is totally independent of the velocity at which the water is moving in the magnetic field since it is the field which varies as regards amplitude, displacement
25 velocity and direction of movement. The system can be adjusted, even after it has been set up and not just during manufacture as with the situation described in document BE 461.600, and covers a very broad range of
30 values $H \cdot V$.

The coils or pairs of coils are placed in a same

plane around the main water delivery pipe, which means that no plumbing work is required if the pipe is of a non-ferromagnetic substance (usually copper or PVC). The angle formed by the pairs of coils can be adjusted, which facilitates installation, water pipes generally being close to walls. Current is applied to the coils or pairs of coils by independent current generators, each being separately adjustable with respect to frequency in order to adjust the spectrum of values V^H to take account of the latitude for adjusting the angle formed by the pairs of coils. Consequently, the device can be readily adjusted to suit the characteristics of the water pipe and the nature of the water, which contains nothing more than calcium carbonate in solution. The range of spectra which is possible in terms of values H^V means that solvation complexes other than that mentioned above can be treated.

The second embodiment illustrated in figure 6A mainly finds applications in injection or carburettor heat engines with enhanced fuel delivery. The device significantly increases the energy efficiency of the fuel and reduces pollution. In the case of injection engines, one or more devices may be placed on the pipes delivering fuel to the injectors and quite close to them. A simple monophasic current generator with a signal of any shape, being adjustable in frequency between several hertz and several thousand hertz, powered by the battery when contact is made, is sufficient.

The size of the magnets and coils is adjusted to match the section of the fuel delivery pipes.

In the case of carburettor engines, the devices are

mounted on the admission pipes for the mixture. Since these pipes are of a larger diameter, the dimensions of the device are adjusted accordingly.

Generally speaking, the device proposed by the
S invention can be used for any type of fluid where a
specific type of behaviour can be improved. Since the
action of the device is totally independent of the
natural movements of the fluids, the fluids do not have
to be flowing through a passage and can be static in a
10 container. By way of example, although this is not
restrictive, the solubility of essential oils in water
can be improved by the action of the device proposed by
the invention.

CLAIMS

1) A device for generating a magnetic field moving
in at least one magnetic field plane located in a given
5 medium and in which the vector product of the intensity
of the magnetic field by its natural displacement
velocity creates stereochemical deformations in the
molecules of said given medium;

said device being characterised in that at least a
10 first means for generating a first magnetic field and a
second means for generating a second magnetic field are
placed in each magnetic field plane, the directions of
said first and second magnetic fields subtending between
them a predefined angle θ and at least one of said first
15 and second magnetic fields being of an amplitude which
can be varied over time so that the resultant of said
first and second magnetic fields is a magnetic field
moving in said field plane having an amplitude which is
variable over time and a direction moving at a variable
20 angular velocity so as to obtain as high a gradient as
possible of said vector product.

2) A device as claimed in claim 1, in which said
first means for generating a magnetic field is a
permanent magnet or a pair of permanent magnets (30, 30')
25 and the second means for generating a magnetic field is
a coil or a pair of coils (32, 32') to which is applied
a current whose intensity can be varied over time so that
the resultant magnetic field is a moving magnetic field
oscillating (Fig. 6B and 6C) between two positions
30 corresponding to the two maximum values, in absolute
value, of the intensity flowing through the coil(s).

3) A device as claimed in claim 1, in which said first means for generating a magnetic field is a coil or a pair of coils (10, 10') and the second means for generating a magnetic field is a coil or a pair of coils (12, 12'), the currents applied to each coil or pair of coils being of variable amplitudes and frequencies and bearing no relation to one another.

4) A device as claimed in claim 3, in which the current applied to the coil or coils of said first means for generating a magnetic field (10, 10') and the current applied to the coil or coils of said second means for generating a magnetic field (12, 12') are sinusoidal currents of the same frequency but of different amplitudes and being shifted in phase by 90°.

5) A device as claimed in claim 3, in which the current applied to the coil or coils of said first means for generating a magnetic field (10, 10') and the current applied to the coil or coils of said second means for generating a magnetic field are sinusoidal currents of the same amplitude but different frequency.

6) A device as claimed in one of claims 1 to 5, in which said given medium is a fluid flowing through a pipe (20), said first and second means for generating a magnetic field being disposed on the exterior of said pipe (figures 1 and 6A).

7) A device as claimed in one of claims 1 to 5, in which said given medium is a fluid flowing through a pipe (20), said first and second means for generating a magnetic field being disposed inside said pipe (figure 8).

8) A device as claimed in claim 6 or 7, in which

said magnetic field plane(s) form(s) an angle of between 45 and 90° with the direction of flow of the fluid to be treated.

9) A device as claimed in one of claims 1 to 8,
5 having several parallel magnetic field planes (figures 9 and 10).

10) A device as claimed in one of claims 1 to 9, in which said means for generating a magnetic field of variable amplitude comprises a pair of coils (10, 10')
10 having a core of a ferromagnetic substance to close the magnetic fields generated by said coils, said core optionally being U-shaped (16), in which case the magnetic field generated occurs in two parallel planes (figure 2), or E-shaped (16) in which case the magnetic
15 field generated occurs in three parallel planes (figure 3).

11) A device as claimed in one of claims 1 to 10, in which said given medium is a limestone water, the application of the magnetic field generated preventing
20 the deposit of limestone incrustations on the walls of pipes, boilers, etc...

12) A device as claimed in one of claims 1 to 10, in which said given medium is a fuel for a heat engine, the application of the magnetic field generated enabling said
25 fuel to enhance and improve combustion efficiency.

20

Device for generating a magnetic field designed to
catalyse physical-chemical reactions

ABSTRACT

5

A device for generating a magnetic field moving in
at least one field plane located in a fluid to be treated
and in which the gradient of the vector product between
the intensity of the magnetic field and its displacement
10 velocity induces stereochemical deformations of the
molecules of the treated fluid, which may be a limestone
water or a fuel. Each field plane may have a first
magnetic field generator such as a pair of coils (10,
10') and a second magnetic field generator such as a pair
15 of coils (12, 12') forming an angle θ with the first
generator, both being disposed at the periphery of the
pipe (20) through which the fluid to be treated is
flowing. At least one of the two field generators
generates a magnetic field whose amplitude is variable
20 over time so that the resultant is a magnetic field
moving in the field plane having a variable amplitude and
a direction moving at an angular velocity such as to
obtain the highest possible gradient of the vector
product.

25

FIGURE 1.

1/4

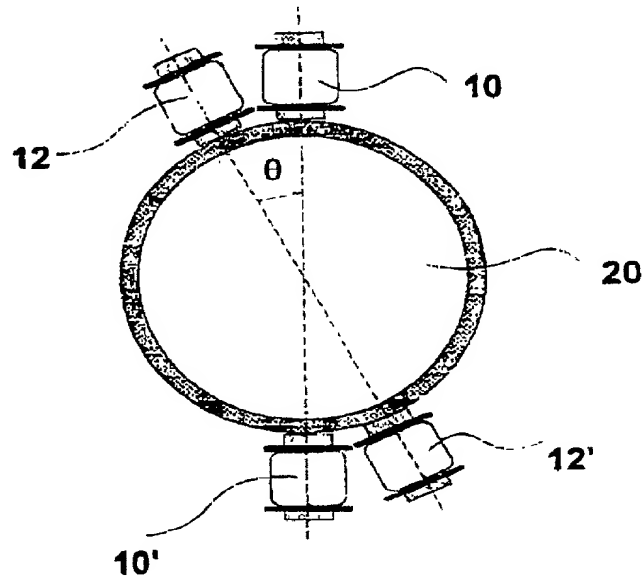


Fig 1

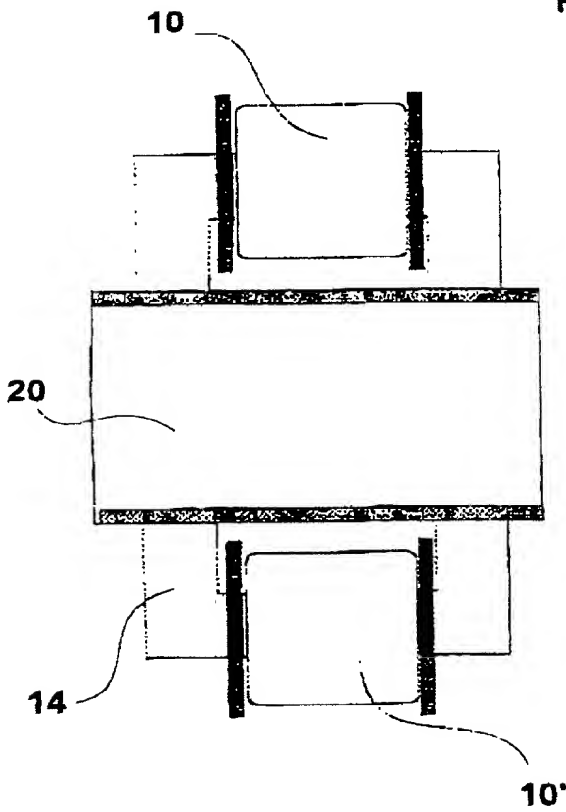


fig 2

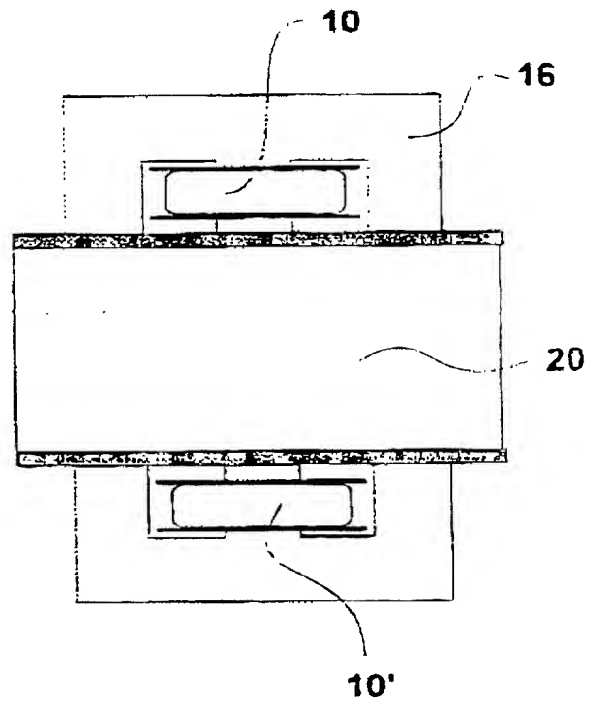


fig 3

2/4

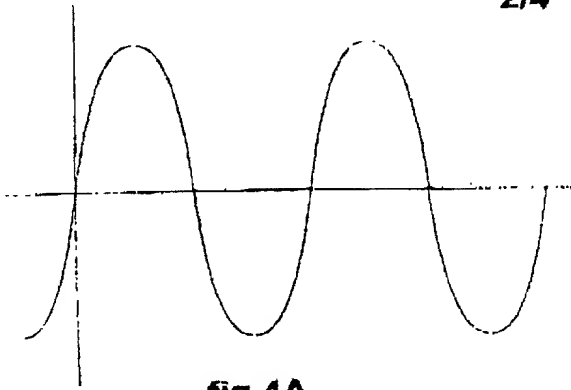


fig 4A

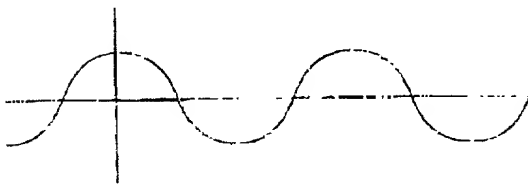


fig 4B

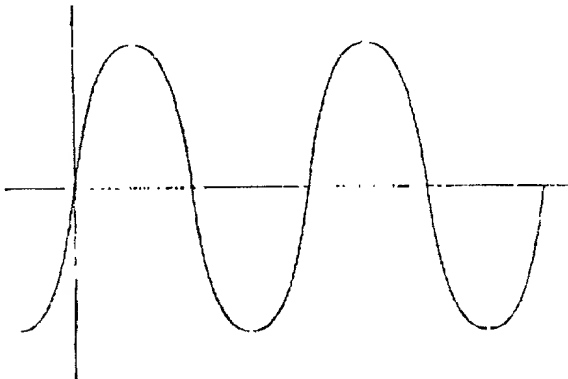


fig 5A

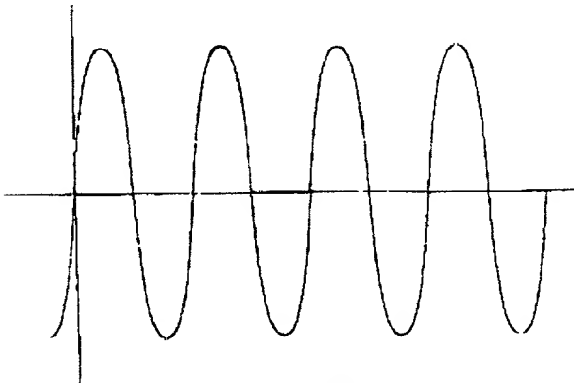


Fig 5B



fig 4C






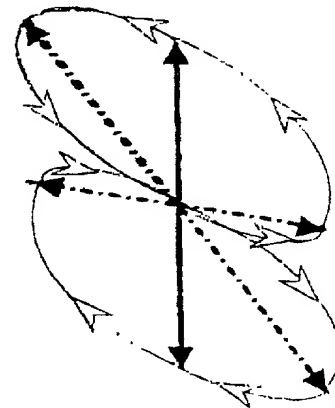


fig 5C

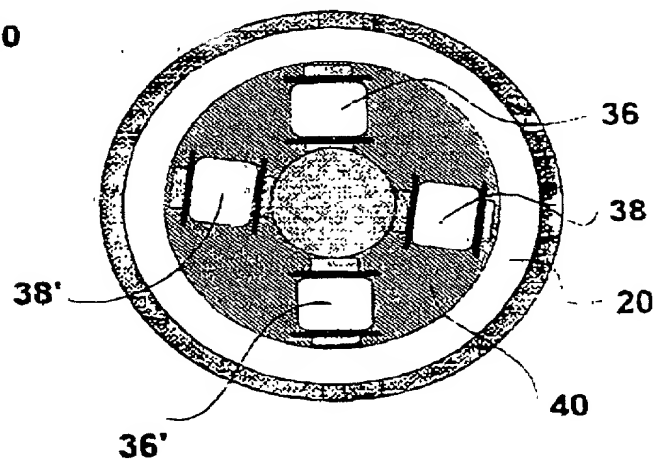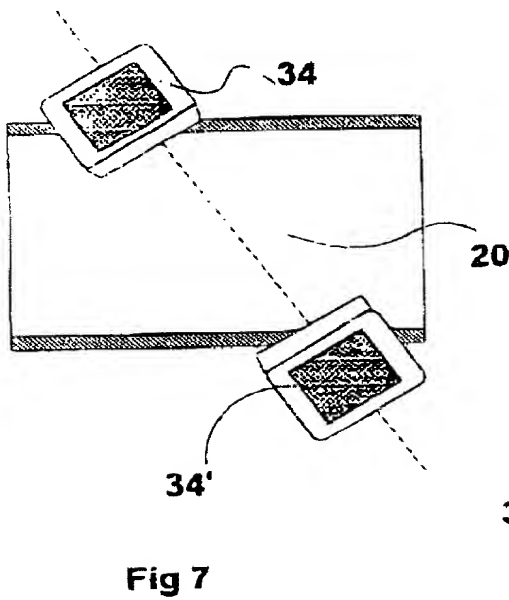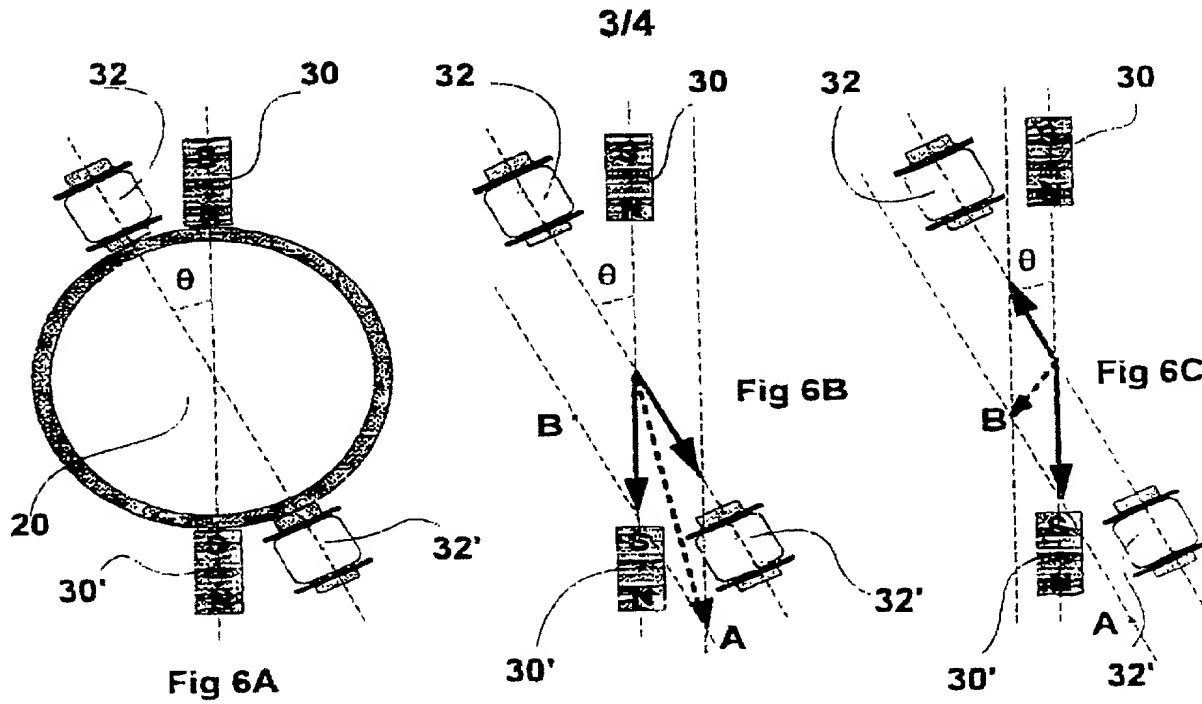

4/4

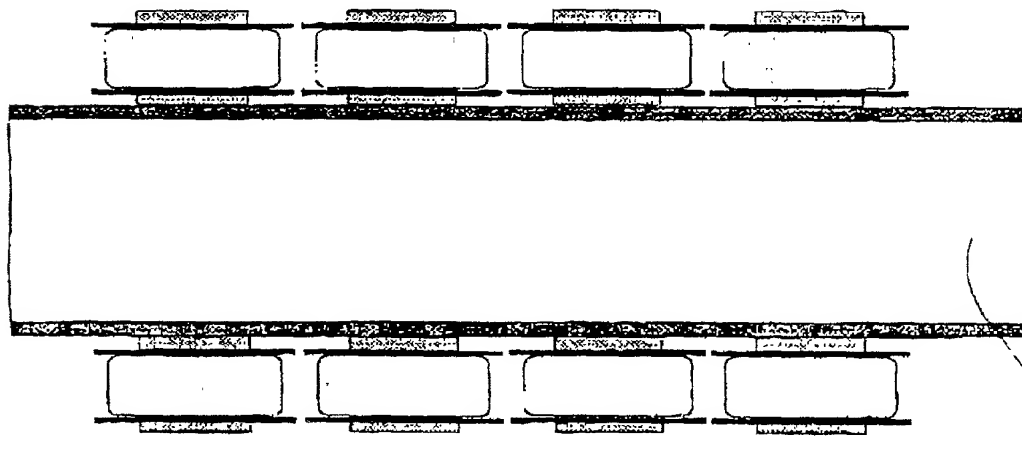

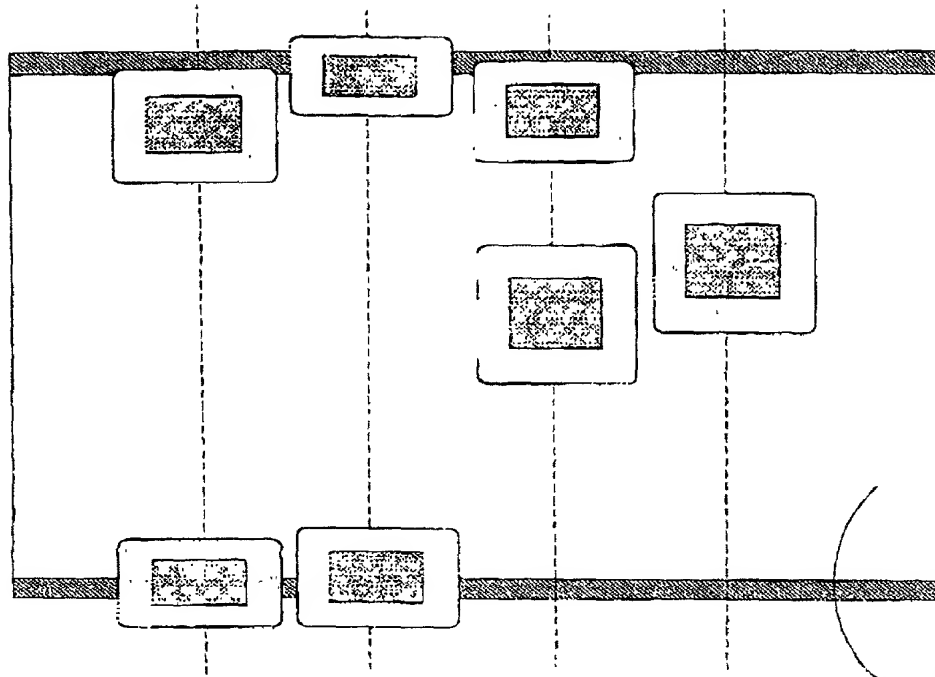

PATENT

ATTORNEY DOCKET #: 144-198**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**DEVICE FOR GENERATING MAGNETIC FIELDS FOR CATALYZING
PHYSICO-CHEMICAL REACTIONS**

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S)


COUNTRY/OFFICE	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED	
France	96/10288	13 August 1996	<input checked="" type="checkbox"/> YES	NO <input type="checkbox"/>
International	PCT/FR97/01488	13 August 1997	<input checked="" type="checkbox"/> YES	NO <input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

PROVISIONAL APPLICATION NUMBER

DATE OF FILING

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or §365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:



PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. §120

Status (check one)

Application Serial No.

Date of Filing

Patented

Pending

Abandoned

☐

☐

☐

☐

☐

☐

And I hereby appoint Arthur H. Seidel, Registration No. 15,979; Gregory J. Lavorgna, Registration No. 30,469; Daniel A. Monaco, Registration No. 30,480; Thomas J. Durling, Registration No. 31,349; John J. Marshall, Registration No. 29,671; and Joseph R. DelMaster, Jr., Registration No. 38,123, as my attorneys or agents with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to Seidel, Gonda, Lavorgna & Monaco, P.C., Suite 1800, Two Penn Center Plaza, Philadelphia, Pennsylvania 19102. Address all telephone calls to Daniel A. Monaco at telephone number (215)568-8383 (telefax: 215-568-5549).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF SOLE OR FIRST INVENTOR

Michel

(GIVEN NAME)

(MIDDLE INITIAL OR NAME)

Riera

(FAMILY OR LAST NAME)

Inventor's signature: Michel RIERA

Date: 23/02/1999

Country of Citizenship: France

Residence:

Châteauneuf de Grasse

(City)

FRANCE

(State or Foreign Country)

Post Office Address: 71. Chemin des Parettes, F-06740 Châteauneuf de Grasse, FRANCE